




SH-T1130






Tubular Solenoid

Unit : mm
Shown energized

PULL TYPE

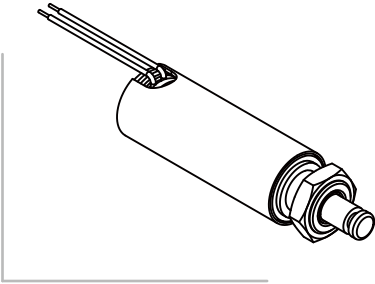


PUSH TYPE

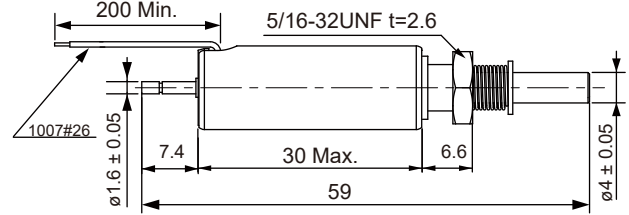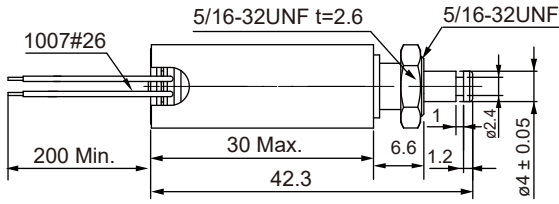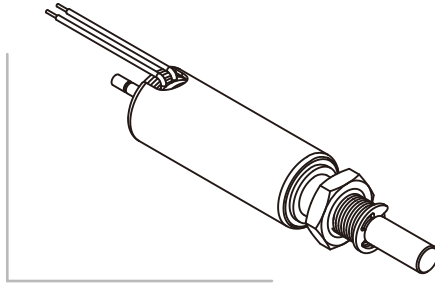

Total Weight : 17 g

DATA FORCE

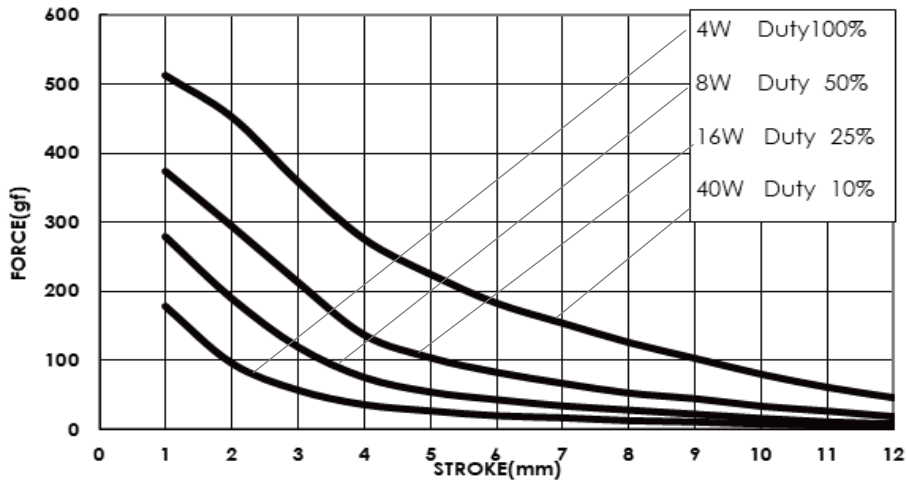

COIL DATA

Duty cycle (%) = $\frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$		Continuous (100%)	Intermittent (50%)	Intermittent (25%)	Intermittent (10%)
Watts at 20°C		4	8	16	40
MAX. "ON" time in seconds		∞	50	5	2
Type no.	Resistance (20°C) $\pm 10\%$	DC Volts			
SH-T1130S/L-06V	9	6	8.5	12	19
SH-T1130S/L-12V	36	12	17	24	38
SH-T1130S/L-24V	144	24	34	48	76
SH-T1130S/L-48V	576	48	68	96	152